


# AdditionalForm

## AdditionalForm (additionalForm) (1.2.2) (BETA)

This field allows you to dynamically load additional dynamic forms!

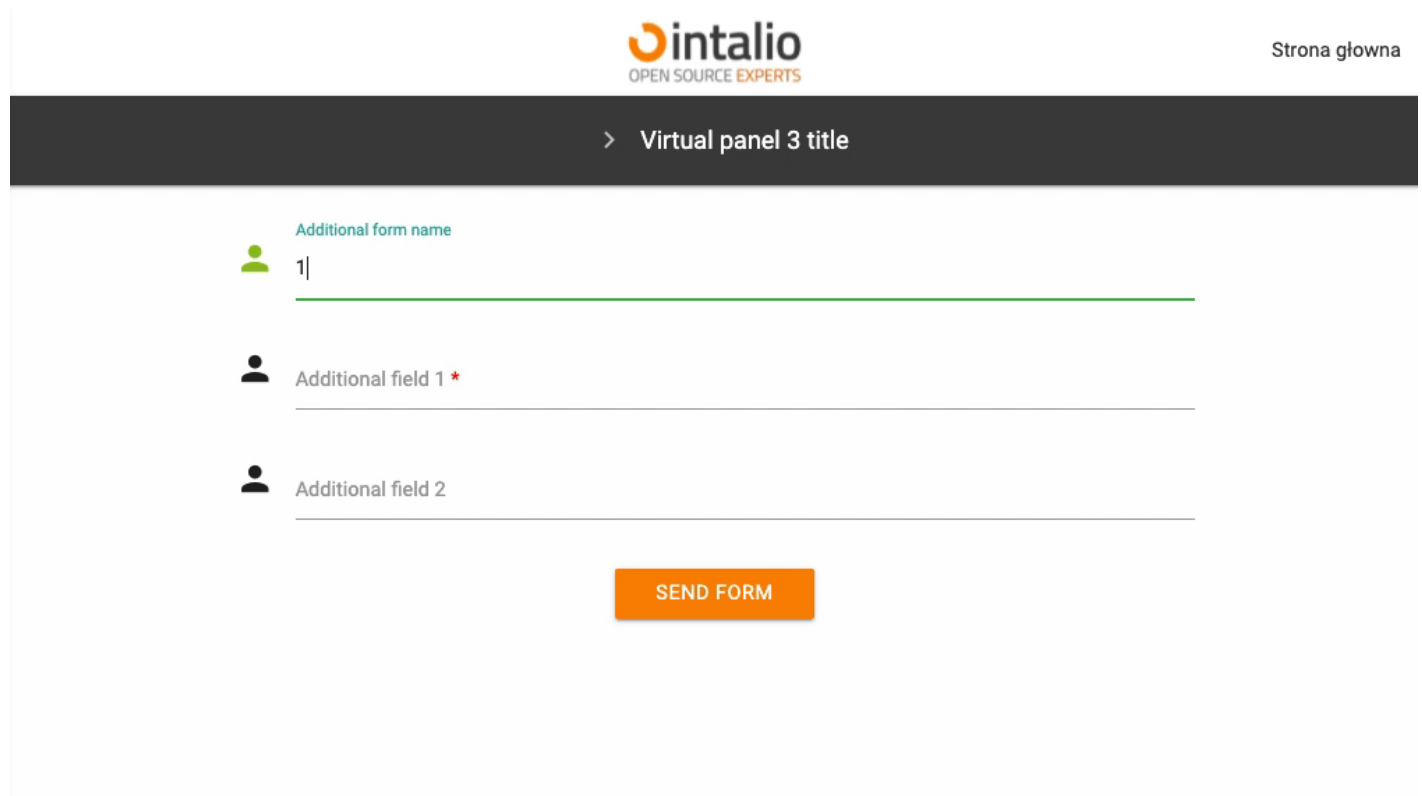

The screenshot shows the intalio application interface. At the top, the intalio logo (an orange circle with a white 'i') and the text 'intalio OPEN SOURCE EXPERTS' are on the left, and 'Strona główna' is on the right. Below the header is a dark grey bar with a white chevron icon and the text 'Virtual panel 3 title'. The main content area is white and contains three form fields, each with a person icon on the left. The first field is labeled 'Additional form name' in teal and contains the text '1|'. The second field is labeled 'Additional field 1' in black with a red asterisk. The third field is labeled 'Additional field 2' in black. At the bottom center of the form area is an orange button with the text 'SEND FORM' in white.

*Example:*

```
{
  "size": "s12 m12",
  "type": "additionalForm",
  "id": "additionalForm",
  "hidden": false,
  "value": "",
```

```

"form_position": null,
"additional_fields": null,
"api_add_lang": false,
"api_watcher": {
  "delay_api": "",
  "fields": [
    {
      "field_id": "additionalFormName",
      "api": "/static/FORMS/API/additionalForms/additionalForm[ ${value} ]. json"
    }
  ]
}
}
}

```

## Field requires 2 configuration options:

### additional\_fields

```

{
  "form_position": 9,
  "additional_fields":
  [
    {
      "size": "s12 m12",
      "type": "text",
      "id": "additional_nazwaOperacji",
      "label": "Nazwa operacji",
      "icon": "person",
      "validate": [
        "required"
      ],
      "hidden": false,
      "value": ""
    },
    {
      "size": "s12 m12",
      "type": "text",

```

```
"id": "additional_opisProblemu",
"label": "Opis problemu",
"icon": "subject",
"validate": [
    "required"
],
"hidden": false,
"value": ""
},
{
    "size": "s12 m12",
    "type": "file",
    "id": "fileField",
    "label": "Załącznik",
    "validate": [
        ""
    ],
    "icon": "attach_file",
    "placeholder": "Załącznik...",
    "hidden": false
},
{
    "size": "s12 m12",
    "type": "file",
    "id": "fileField",
    "label": "Załącznik",
    "validate": [
        ""
    ],
    "icon": "attach_file",
    "placeholder": "Załącznik...",
    "hidden": false
},
{
    "size": "s12 m12",
    "type": "file",
    "id": "fileField",
    "label": "Załącznik",
    "validate": [
        ""
    ]
```

```
    ],  
    "icon": "attach_file",  
    "placeholder": "Załącznik...",  
    "hidden": false  
  }  
]  
}
```

## form\_position

index from which new fields are to be added

The "additional\_form" mechanism is still in beta, so determining the order of the form may seem difficult.  
...TODO...

## Use cases:

For example, if any selection is to load an additional form from another file, we can use `api_watcher` and the `additionalForm` field.

Dynamically loaded forms currently do not support API dependencies.

## The rest of the available parameters:

This field supports all parameters with ["Attributes available for each field"](#).

---

Revision #5

Created Wed, Nov 10, 2021 11:30 AM by [editor](#)

Updated Fri, Jun 24, 2022 9:56 AM by [editor](#)