

Main configuration file - global settings

This topic refers to the file `static/SystemConfig.json`.

Example configuration file:

```
{
  "SystemUrl": "XSYSTEM_URLX",
  "Alias": "XSYSTEM_ALIASX",
  "SystemUrl_DEV": "www.example.com/system"
  "ShowLangButton": true,
  "LangButtonColor": "#333333",
  "GlobalLang": "pl",
  "RedirectButtons": [
    {
      "color": "#333333",
      "label": "Moje zgłoszenia",
      "redirectURL": "https://yahoo.pl"
    },
    {
      "color": "#333333",
      "label": "Nowe zgłoszenie",
      "redirectURL": "https://google.pl"
    }
  ]
}
```

Description of individual values:

`OtrsUrl/SystemUrl` - Address of the OTRS/OTOBO module that will accept the request

`Alias` - Alias under which the forms will appear


`ShowLangButton` - Should the language change button be visible (if we have only one language, we can hide it)

`LangButtonColor`

- Color of the language change button

`GlobalLang` - Default form language (loaded by default, unless otherwise specified by OTRS configuration)

`RedirectButtons` - Optional forwarding buttons

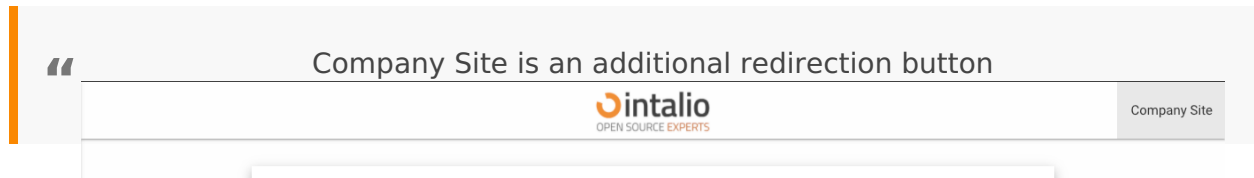

RedirectButtons parameters - this parameter counts an array with objects containing parameters

`show` - ~~should the button be visible~~

`color` - color of the redirection button

`label` - button caption

`redirectURL` - forwarding address

Revision #13

Created Tue, May 19, 2020 3:53 PM by [editor](#)

Updated Fri, Sep 9, 2022 10:27 AM by [editor](#)